



TECHNICAL RECOMMENDATIONS:

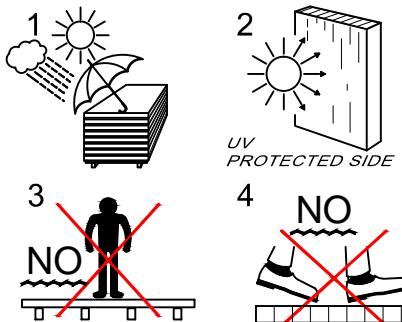


1. PROTECT THE SHEETS BY THE SUN AND RAIN
2. INSTALL THE SHEETS ALWAYS WITH THE UV PROTECTED LAYER FACING OUTWARDS
3. MULTIWALL POLYCARBONATE SHEETS CAN NOT BE WALKED UPON
4. DO NOT WALK ONTO THE SHEETS AT ANY TIME. FOLLOW SAFETY REGULATIONS AND SAFE METHODS OF INSTALLATION

POLYCARBONATE SUFFER THE CHEMICAL ATTACK OF SOME PRODUCTS, THEREFORE:

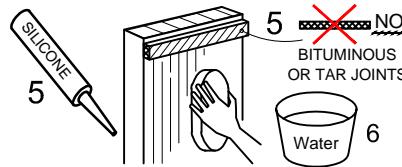

5. USE ONLY COMPATIBLE CLEAR SILICONE FOR THE SEALING
6. USE ONLY WATER AND MILD DETERGENTS FOR THE CLEANING.




THE SHEETS ARE SUPPLIED TO THE EXACT LENGTH REQUIRED EITHER THERMOSEAL OR SEALED WITH AN ALUMINIUM FOIL TAPE AT THE ENDS

7. CUTTING OF THE SHEETS CAN BE EXECUTED ON SITE BY MEANS OF A HACK SAWING MACHINE (1) OR OF A CUTTER (2). SEAL THE OPEN CELLS AFTER THE CUTTING.




8. TAKE OFF THE PROTECTIVE FILM BEFORE THE INSTALLATION




ONLY FOR ALUMINIUM CAP.

10. PROTECT THE SEALING WITH AN UPPER AND A LOWER PROFILE
- 10.a LOWER PROFILES MUST BE DRILLED FOR WATER DRAINING

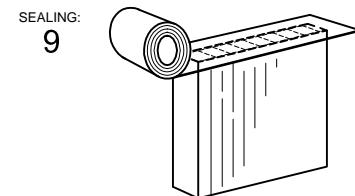


ONLY FOR ALUMINIUM CAP.


9. SEAL THE OPEN CELLS WITH AN ADHESIVE ALUMINIUM TAPE

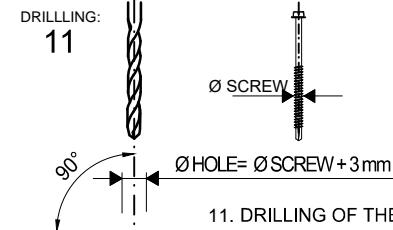

11. DRILLING OF THE SHEETS CAN BE EXECUTED ON SITE BY MEANS OF A DRILL AND SUITABLE HEADS. THE HOLE MUST BE 3mm WIDER THAN SCREW GAUGE OR A SLOT ALONG THE LENGTH

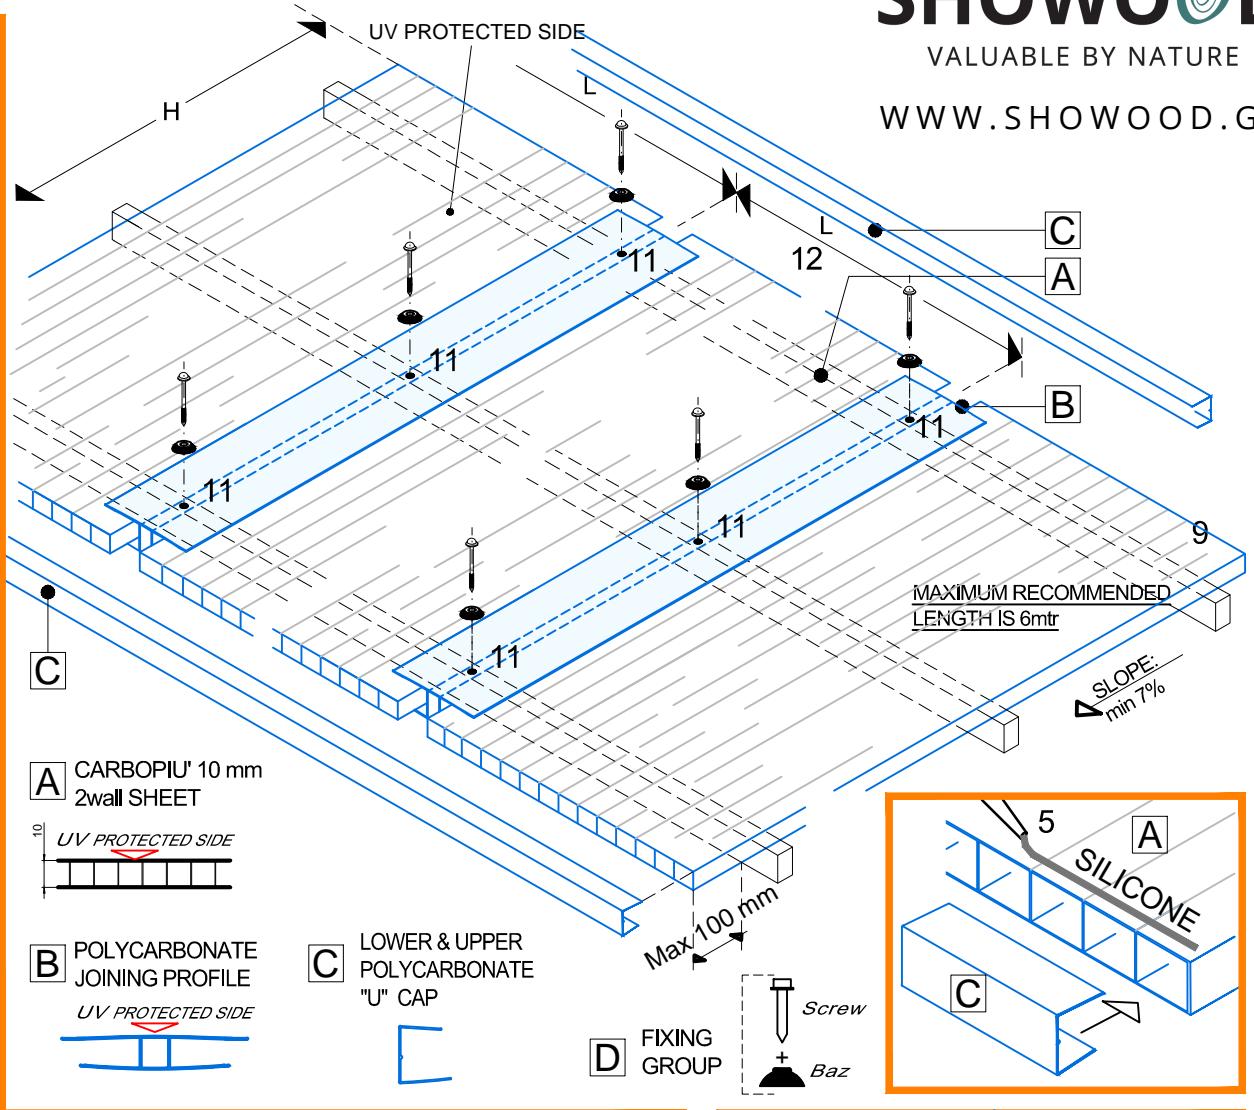

12

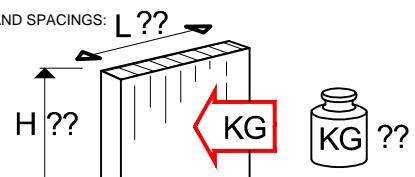

12. CHECK OUR TECHNICAL LITERATURE TO DETERMINE LOADING AND SPACING OF THE WHOLE SYSTEM

